


65" Interactive Flat Panel

TEAM
BOARD

TM 65 AD11

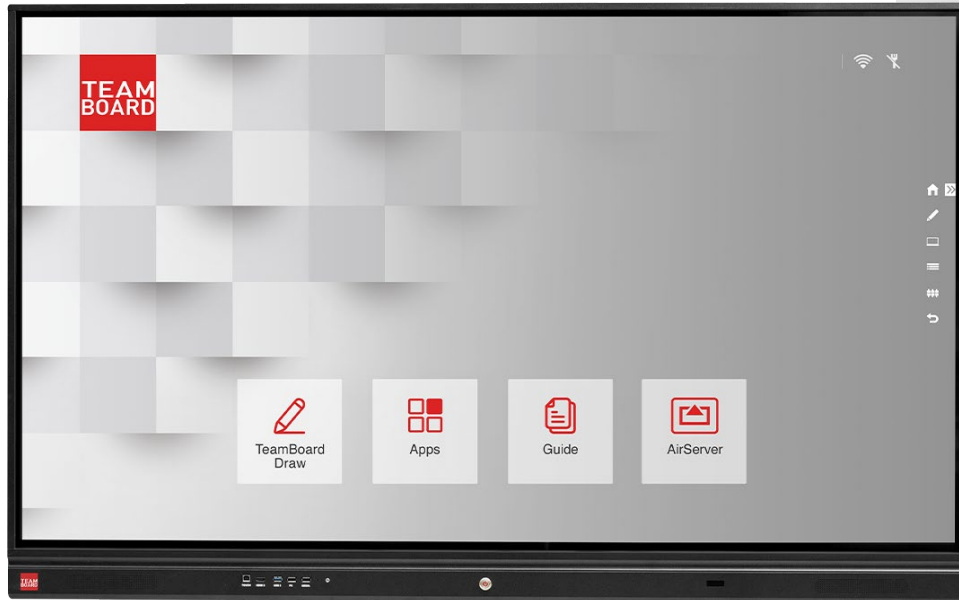

Overview

- TeamBoard multi-touch screens incorporate 20 points of touch with the slimmest IR screen on the market.
- Complete with TeamBoard Android OS, the system is completely plug and play, with no drivers necessary for interaction.
- All TeamBoard screens work with Windows, OSX and Linux operating systems.
- The screen 4K resolution, LED high brightness backlight and wide screen format provides an ideal medium for presentation, interaction and collaboration.
- There are ample I/O ports that would suit any audio-visual environment, making the TeamBoard a must-have companion for education, government and the corporate sector.
- TeamBoard multi-touch screens come ready for easy wall or trolley installation.



Features

- Optical Slim IR Technology
- Powered by TeamBoard Android OS™
- Multi-touch – 20 touch points
- Pre-installed interactive apps
- Integrated inbuilt sound bar
- 4K resolution (3840 x 2160 px)
- OPS Slot
- TeamBoard Draw™ app (Windows)
- Mobile and electric height-adjustable options available
- Warranty - Refer to your local distributor
- Ships with wall-mount bracket

65" Interactive Flat Panel

TEAM
BOARD

TM 65 AD11

TECHNICAL SPECIFICATIONS

| | |
|------------------------|--|
| Resolution | Up to 3840 x 2160 @ 60Hz |
| Display Features | LED backlight |
| Screen dimension | 65" / 1397mm |
| Set dimension | 58.14" (L) x 36.13" (H) x 3.45" (W) / 1476.8mm (L) x 917.8mm (H) x 97.7mm (W) - Not including base |
| Temperature / Humidity | 0°C ~ 40° / ≤80% |
| Net weight | 36KG / 79.36lbs |
| Aspect Ratio | 16:9 |
| Brightness | 350 cd/m2 |
| Contrast | 1200:1 or higher |
| Colours | 10bit, 1.07 Billion colours |
| View Angle | 178° |
| Screen Mode | 16:9 / 4:3 / dot to dot / Full screen |
| Support Resolution | 4K Ultra HD 3840 x 2160 @60Hz |
| Voltage range | AC 100-240V~, 50/60Hz |
| Power range | Standby Power <1W - Working 230W |
| Audio | 15W x 15W internal speakers |
| VESA mount | 400 x 300 mm or 500 x 400 mm, M8 Screw |
| Panel Response Time | 8 ms |

CONNECTIVITY

FRONT

| | |
|------------------|-------------|
| HDMI | 1 |
| USB 3.0 A (Blue) | 3 |
| USB 3.0 B (Blue) | 1 x (Touch) |
| USB 3.0 Type C | 1 |

REAR

SIDE

| | |
|-------------------|---|
| HDMI | 2 |
| USB 2.0 A (White) | 1 |
| USB 3.0 A (Blue) | 2 |
| USB 3.0 B (Touch) | 1 |
| USB 3.0 Type C | 1 |
| DP | 1 |
| HDMI OUT | 1 |

BOTTOM

| | |
|----------------------|-------------------|
| VGA | 1 x DE-15F |
| VGA Audio (PC) Input | 1 x 3.5 stereo |
| MIC Input | 1 x 3.5 stereo |
| Headphone Out | 1 x 3.5 |
| Network (LAN) | 2 x RJ45 IN - OUT |
| USB 3.0 B (Touch) | 1 |
| SPDIF | 1 RCA |

ANDROID 11 SPECIFICATIONS

| | |
|----------------|-----------------------------------|
| CPU | 4 x ARM Cortex-A73 2.28GHz 64 bit |
| | 4 x ARM Cortex-A53 2.28GHz 64 bit |
| GPU | 8 x ARM Mali-G52 |
| Dual wifi card | WIFI 6 & 8 Bluetooth + WIFI 5G |
| SD RAM | 8GB DDR4 |
| EMMC | 64G |

TOUCH PARAMETERS

| | |
|------------------------|--|
| Touch Technology | Infrared Touch |
| Touch points | Up to 20 point multi touch |
| Writing mode | Finger, stylus or any non-transparent object |
| Positioning technology | IR technology |
| Positioning accuracy | <1mm |
| Positioning resolution | 4096 x 4096 |
| Response time | 5ms |
| Cursor speed | 180 dot/sec |
| Connection Port | USB plug and play |
| Operating system | Windows / Linux / Mac / Android |
| PC response | System auto response |

PHYSICAL SPECIFICATIONS

| | |
|---------------------|---|
| Package Dimensions | 64.80" (L) x 42.28" (H) x 8.86" (W) / 1646mm (L) x 1074mm (H) x 225mm (W) |
| Gross weight in box | 50KG / 110.23lbs |
| Screen Dimensions | 1476.8mm (L) x 917.8mm (H) x 87.7mm (W) |
| Net Weight | 36KG / 79.36lbs |

Remark:

Above mentioned parameters are for Standard models and are subject to change without notice. * Not all applications are compatible with Android 11.



Mobility solutions

At TeamBoard we pride ourselves on designing and building customised solutions to solve many bespoke problems.